

# 2025 CATALOG

Ap<sup>®</sup> Audiopipe<sup>®</sup>  
LOUD & CLEAR







**KEY WEST**



# TABLE OF CONTENTS

<b>Loudspeakers</b>	<b>2 - 9</b>
<b>Speaker Tower Enclosure</b>	<b>10 - 15</b>
<b>Soundbars</b>	<b>16</b>
<b>Amplifiers</b>	<b>17 - 19</b>
<b>LED Accessories</b>	<b>20 - 22</b>
<b>Head Units</b>	<b>23</b>
<b>Connectivity Devices</b>	<b>24</b>
<b>Radio Accessories</b>	<b>25</b>
<b>Tweeters</b>	<b>26</b>
<b>Coaxials</b>	<b>27 - 28</b>
<b>Speaker Accessories</b>	<b>29</b>
<b>Marine Speaker Cables</b>	<b>30 - 33</b>
<b>Marine Speaker Wire</b>	<b>34</b>
<b>Amplifier Installation</b>	<b>35</b>
<b>Accessories</b>	<b>36 - 39</b>



# APMP LOUDSPEAKERS



Scan to learn more  
about our APMP  
Loudspeakers

## Compression Horn Series

Our APMP Compression Horn Midrange Loudspeakers are not like our regular midrange speakers due to the built-in compression horn. Not only do you get superb lows and midranges but you're also going to get that high end vocal sound that you would get out of a tweeter.




### Includes Driver Crossover Network

The crossover network divides an audio signal into multiple frequency bands. This is done to optimize which frequencies are directed to multiple speaker drivers.

Splitting the frequency range up into multiple bands with a crossover, each dedicated to their own driver, allows the speaker to more efficiently reproduce full-range audio with better fidelity.

**CARBON  
FIBER  
CONE**




### Carbon Fiber Cone

Carbon fiber cones allow for moisture and temperature resistance, while it's rigidness prevents cone flex when driven hard. The combination of ultralight weight, high stiffness, and controlled breakup behavior provides immediate benefits for mid-to high-frequency applications.



### Built-In Compression Horn Driver

Our built-in compression horn drivers produce dynamics far better than most dome tweeters. The shape/size of the horn has a tremendous impact on the sound quality. They are highly efficient in translating electrical input into sounds, from low levels to insanely loud that gives a better representation of realism.



### Dust-Proof Acoustic Foam

We added a layer of acoustic foam in the horn throat as another way to protect these loudspeakers from the elements. This layer of acoustic foam prevents dust from entering through the horn throat and damaging the compression driver making this speaker ideal for off-roading and all-terrain vehicles while maintaining sound quality and performance.





## APMP-623CHF

**6" COMPRESSION HORN MIDRANGE LOUDSPEAKER**

• **For indoor or outdoor use**

- 250 Watts Power (P.M.P.O)
- 125 Watts Power (R.M.S)
- Frequency Response: 95-20,000Hz
- Sensitivity: 92dB
- 1.5" Kapton Voice Coil
- Reinforced Cloth Surround with Carbon Fiber Cone
- Liquid Metal Plastic, as Strong as a Steel Basket
- Mounting Depth: 75mm (3")
- 2.5" Horn Loaded Compression Driver
- 12dB OCT. Separated Crossover
- Impedance: 4 Ohms
- 23 Oz Magnet

**250  
Watts**



**APMP-68CHF-VC**  
Replacement Coil for  
APMP-623CHF



White Grills  
Included

## APMP-843CHF

**8" COMPRESSION HORN MIDRANGE LOUDSPEAKER**

• **For indoor or outdoor use**

- 300 Watts Power (P.M.P.O)
- 150 Watts Power (R.M.S)
- Frequency Response: 80-20,000Hz
- Sensitivity: 95dB
- 1.5" Kapton Voice Coil
- Reinforced Cloth Surround with Carbon Fiber Cone
- Liquid Metal Plastic, as Strong as a Steel Basket
- Mounting Depth: 89mm (3-1/2")
- 2.5" Horn Loaded Compression Driver
- 12dB OCT. Separated Crossover
- Impedance: 4 Ohms
- 43 Oz Magnet

**300  
Watts**



**APMP-68CHF-VC**  
Replacement Coil for  
APMP-843CHF



White Grills  
Included

## APMP-6923CHF

**6"x9" COMPRESSION HORN MIDRANGE LOUDSPEAKER**

**NEW**

• **For indoor or outdoor use**

- 250 Watts Power (P.M.P.O)
- 125 Watts Power (R.M.S)
- Frequency Response: 90-20,000Hz
- Sensitivity: 91dB
- 1.5" Kapton Voice Coil
- Reinforced Cloth Surround with Carbon Fiber Cone
- Liquid Metal Plastic, as Strong as a Steel Basket
- Mounting Depth: 86mm (3-3/8")
- 2.5" Horn Loaded Compression Driver
- 12dB OCT. Separated Crossover
- Impedance: 4 Ohms
- 23 Oz Magnet

**250  
Watts**



**APMP-68CHF-VC**  
Replacement Coil for  
APMP-6923CHF



White Grills  
Included

## APMP-1043CHF

**10" COMPRESSION HORN MIDRANGE LOUDSPEAKER**

• **For indoor or outdoor use**

- 400 Watts Power (P.M.P.O.)
- 200 Watts Power (R.M.S.)
- Frequency Response: 55-20,000Hz
- Sensitivity: 92dB
- 2" Kapton Voice Coil
- Reinforced Cloth Surround with Carbon Fiber Cone
- Liquid Metal Plastic, as Strong as a Steel Basket
- Mounting Depth: 102mm (4")
- 3.5" Horn Loaded Compression Driver
- 12dB OCT. Separated Crossover
- Impedance: 4 Ohms
- 40 Oz Magnet

**400  
Watts**



**APMP-1043CHF VC**  
Replacement Coil for  
APMP-1043CHF



White Grills  
Included




# APMP LOUDSPEAKERS



Scan to learn more  
about our APMP  
Loudspeakers


## Component Series

Our Component Series APMP Loudspeakers were crafted to be combined with our tweeters and crossovers to create the ultimate audio listening experience in your vehicle. Installing these component speakers in your craft gives you a sound that has better tonal clarity, better sound stage, and better imaging. Combine this performance quality with the rugged and durable build of these APMP speakers and you get amazing sound for virtually any outdoor terrain.




### Carbon Fiber Cone

Carbon fiber cones allow for moisture and temperature resistance, while its rigidity prevents cone flex when driven hard. The combination of ultralight weight, high stiffness, and controlled breakup behavior provides immediate benefits for mid- to high-frequency applications.

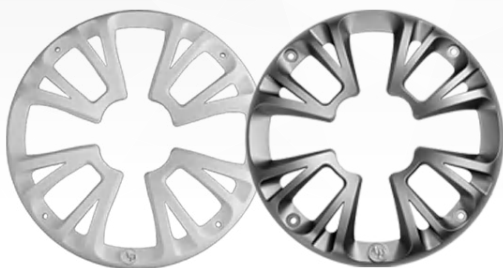

**Titanium & White  
Grills Included**



### Dome-Type Dust Cap

Carbon fiber cones allow for moisture and temperature resistance, while its rigidity prevents cone flex when driven hard. The combination of ultralight weight, high stiffness, and controlled breakup behavior provides immediate benefits for mid- to high-frequency applications.

**CARBON  
FIBER  
CONE**





## APMP-620CF

### 6" ENHANCED HIGH FREQUENCY LOUDSPEAKER

- **For indoor or outdoor use**

- 250 Watts Power (P.M.P.O.)
- 125 Watts Power (R.M.S.)
- Frequency Response: 50-10000 Hz
- Sensitivity: 90 dB
- 1.5" TIL Voice Coil
- Liquid Metal Plastic, as Strong as a Steel Basket
- Mounting Depth: 81mm (3-1/4")
- Impedance: 4 Ohms
- 21oz Magnet

**250**  
Watts



6"

## APMP-838CF

### 8" ENHANCED HIGH FREQUENCY LOUDSPEAKER

- **For indoor or outdoor use**

- 500 Watts Power (P.M.P.O.)
- 250 Watts Power (R.M.S.)
- Frequency Response: 45 - 10,000Hz
- Sensitivity: 92dB
- 1.5" TIL Voice Coil
- Liquid Metal Plastic, as Strong as a Steel Basket
- Mounting Depth: 98mm (3-7/8")
- Impedance: 4 Ohms
- 38 Oz Magnet

**500**  
Watts



8"




# APMP LOUDSPEAKERS



Scan to learn more  
about our APMP  
Loudspeakers

## Flat Series

We engineered our Flat Series APMP Loudspeakers to be all you need in a mid-range pro audio speaker; delivering incredible sound, loudness, and reliability, all in an extremely shallow and versatile footprint. The shallow baskets allow for installations in applications where limited mounting depth is available.



### Carbon Fiber Cone

Carbon fiber cones allow for moisture and temperature resistance, while it's rigidity prevents cone flex when driven hard. The combination of ultralight weight, high stiffness, and controlled breakup behavior provides immediate benefits for mid- to high-frequency applications.



### Dome-Type Dust Cap

Carbon fiber cones allow for moisture and temperature resistance, while it's rigidity prevents cone flex when driven hard. The combination of ultralight weight, high stiffness, and controlled breakup behavior provides immediate benefits for mid- to high-frequency applications.



### Shallow Mounting Depth

The cutting-edge "liquid metal plastic" shallow baskets provide an ideal mounting depth which allows for installations in applications where limited mounting depth is available.



Liquid Metal Plastic  
Strong as Steel



Titanium & White  
Grills Included

**CARBON  
FIBER  
CONE**



MODEL: APMP-834CFF  
300 WATTS MAX.  
150 WATTS RMS  
4Ω  
MOUNTING DEPTH: 64MM (2 1/2")  
SERIAL: 01101604440069



## APMP-618CFF

### 6" ENHANCED HIGH FREQUENCY LOUDSPEAKER

• **For indoor or outdoor use**

- 250 Watts Power (P.M.P.O.)
- 125 Watts Power (R.M.S.)
- Frequency Response: 75-10,000Hz
- Sensitivity: 90dB
- 1.5" TIL Voice Coil
- Liquid Metal Plastic, as Strong as a Steel Basket
- Mounting Depth: 55mm (2-3/16")
- Impedance: 4 Ohms
- 18 Oz Magnet

**250**  
Watts

**2-3/16"**  
Mounting  
Depth



## APMP-834CFF

### 8" ENHANCED HIGH FREQUENCY LOUDSPEAKER

• **For indoor or outdoor use**

- 300 Watts Power (P.M.P.O.)
- 150 Watts Power (R.M.S.)
- Frequency Response: 70-9,000Hz
- Sensitivity: 90dB
- 1.5" TIL Voice Coil
- Liquid Metal Plastic, as Strong as a Steel Basket
- Mounting Depth: 64mm (2-1/2")
- Impedance: 4 Ohms
- 34 Oz Magnet

**300**  
Watts

**2-1/2"**  
Mounting  
Depth



## APMP-1044CFF

### 10" ENHANCED HIGH FREQUENCY LOUDSPEAKER

• **For indoor or outdoor use**

- 400 Watts Power (P.M.P.O.)
- 200 Watts Power (R.M.S.)
- Frequency Response: 40-4,000 Hz
- Sensitivity: 92dB
- 2" Kapton Voice Coil
- Liquid Metal Plastic, as Strong as a Steel Basket
- Mounting Depth: 3-7/16"
- Impedance: 4 Ohms
- 40 Oz Magnet

**400**  
Watts

**3-7/16"**  
Mounting  
Depth





# APMP LOUDSPEAKERS



Scan to learn more  
about our APMP  
Loudspeakers

## LED Series

Nothing finishes off a stunning marine audio system like LED lighting, which is why we equipped our LED Series loudspeakers with RGB LED accent lighting. These LED's are completely customizable and programmable via the included remote control so setting the perfect mood with these loudspeakers is easy and fun!




**Titanium & White  
Grills Included**

**CARBON  
FIBER  
CONE**



Liquid Metal Plastic  
Strong as Steel



## Carbon Fiber Cone

Nothing finishes off a stunning marine audio system like LED lighting, which is why we equipped our LED Series loudspeakers with RGB LED accent lighting. These LED's are completely customizable and programmable via the included remote control so setting the perfect mood with these loudspeakers is easy and fun!



## LED Illumination

The brilliant LED's that are built-in illuminate the carbon fiber cone and can be programmed to many colors and patterns making it very easy and fun to customize to your boat. With several strobe mode patterns to choose from you can enjoy the light display how ever you choose.



Compatibility With  
**NL-BLESP-KT**





## APMP-T625LD

6" 2-WAY ENHANCED HIGH FREQUENCY LOUDSPEAKER WITH LED LIGHTS

• **For indoor or outdoor use**

- 250 Watts Power (P.M.P.O.)
- 125 Watts Power (R.M.S.)
- Frequency Response: 60 - 20,000Hz
- Sensitivity: 88dB
- 1.2" Kapton Voice Coil
- Liquid metal plastic strong as steel basket
- Titanium diaphragm high performance tweeter
- Mounting depth: 3-1/4"
- LED color lights
- Impedance: 4 Ohms
- 15 Oz magnet

**250**  
Watts



**TITANIUM**

## APMP-T830LD

8" 2-WAY ENHANCED HIGH FREQUENCY LOUDSPEAKER WITH LED LIGHTS

• **For indoor or outdoor use**

- 500 Watts Power (P.M.P.O.)
- 250 Watts Power (R.M.S.)
- Frequency Response: 50 - 20,000Hz
- Sensitivity: 90dB
- 1.5" Kapton Voice Coil
- Liquid metal plastic strong as steel basket
- Titanium diaphragm high performance tweeter
- Mounting depth: 3-5/8"
- LED color lights
- Impedance: 4 Ohms
- 22 Oz magnet

**500**  
Watts



**TITANIUM**



Compatibility With  
**NL-8LESP-KT**



## Speaker Tower Enclosure

### APSW-8505WTW

#### 8" CARBON FIBER TOWER SPEAKER

- 300 Watts Power (P.M.P.O.)
- 150 Watts Power(R.M.S.)
- Frequency Response:80-20,000Hz
- Sensitivity:95dB
- 1.5" Kapton Voice Coil
- Reinforced Cloth Surround with
- Carbon Fiber Cone
- Liquid Metal Plastic Strong as Steel Basket
- 1.5" PEN Dome Loaded Compression Driver
- 12dB/OCT. Crossover
- Impedance: 4 Ohms
- 43 Oz Magnet
- **Sold in pairs**

**300**  
Watts

**CARBON**  
**FIBER**  
**CONE**

#### Mounting Spacers Included:

1 3/4", 1 1/2", 1 7/8", 1 5/8", 2", 2 1/4", 2 1/2", 2 3/8"



**APMP-68CHF-VC**  
Replacement Coil for  
APSW-8505WTW



### APSW-8505BTW

#### 8" CARBON FIBER TOWER SPEAKER

- 300 Watts Power (P.M.P.O.)
- 150 Watts Power(R.M.S.)
- Frequency Response:80-20,000Hz
- Sensitivity:95dB
- 1.5" Kapton Voice Coil
- Reinforced Cloth Surround with
- Carbon Fiber Cone
- Liquid Metal Plastic Strong as Steel Basket
- 1.5" PEN Dome Loaded Compression Driver
- 12dB/OCT. Crossover
- Impedance: 4 Ohms
- 43 Oz Magnet
- **Sold in pairs**

**300**  
Watts

**CARBON**  
**FIBER**  
**CONE**

#### Mounting Spacers Included:

1 3/4", 1 1/2", 1 7/8", 1 5/8", 2", 2 1/4", 2 1/2", 2 3/8"



**APMP-68CHF-VC**  
Replacement Coil for  
APSW-8505BTW





## APMS-T836H

8" WEATHER-PROOF SPEAKER WITH BUILT COMPRESSION DRIVER

**NEW**

- 250 Watts Power [P.M.P.O.]
- 150 Watts Power [R.M.S.]
- Frequency Response: 50-22,000Hz
- Sensitivity: 90dB
- 2" Kapton Voice Coil
- Rigid Steel Basket
- PP Cone with Rubber Surround
- 3" Horn Loaded Compression Driver
- 12dB OCT. Passive Crossover
- Mounting Depth: 146mm (5-3/4")
- Impedance: 4 Ohms
- 40 Oz Magnet
- **Compatible with our empty pods or as a stand alone**



**250**  
Watts

**CARBON**  
**FIBER**  
**CONE**



White Grills  
Included



**APMP-68CHF-VC**  
Replacement Coil for  
APSW-T836H

## APMP-843TWR

CARBON FIBER TOWER SPEAKER COMBO

**NEW**

### APMP-800ETW

- Opening Diameter: 8"
- Durable and Weatherproof ABS Material
- Empty Enclosure with Slotted Mounting Holes for Different Bolt Patterns
- Directional Aiming 22°
- Cast Aluminum Bracket
- Fits Mounting Tube Sizes: 1-13/16", 2-1/4", 2-3/8", 2-1/2", 2-5/8"
- Removable Cable Grommet for Easy Addition of LED Wiring
- Connection: Satin Nickel Plated Brass Binding Posts
- Enclosure Dimensions: 8.5" x 9.8"

### APMP-843CHF

- 300 Watts Power (P.M.P.O.)
- 150 Watts Power (R.M.S.)
- Frequency Response: 80~20,000Hz
- Sensitivity: 95dB
- 1.5" Kapton Voice Coil
- Reinforced Cloth Surround with Carbon Fiber Cone
- Liquid Metal Plastic Strong as Steel
- Steel Basket
- Mounting Depth: 3-1/2" (89mm)
- 2.5" Horn Loaded Compression Driver
- 12dB OCT. Separated Crossover
- Impedance: 4 Ohms
- 43 Oz Magnet



**SOLD IN PAIR**

**300**  
Watts

**CARBON**  
**FIBER**  
**CONE**



**APMP-68CHF-VC**  
Replacement Coil for  
APMP-844TWR



### APMP-600ETW

#### MULTIPURPOSE SPEAKER ENCLOSURE FOR 6" SPEAKER

- Opening Diameter: 6" - 6.5"
- Durable and Weatherproof ABS Material
- Empty Enclosure with Slotted Mounting Holes for Different Bolt Patterns
- Directional Aiming 22°
- Cast Aluminum Bracket
- Fits Mounting Tube Sizes: 1-13/16", 2-1/4", 2-3/8", 2-1/2", 2-5/8"
- Removable Cable Grommet for Easy Addition of LED Wiring
- Connection: Satin Nickel Plated Brass Binding Posts
- Enclosure Dimensions: 7.1" x 8.8"
- **Made to fit all Audiopipe APMP speakers. Additional ring included to fit all other 6.5" speakers.**



Mounting Spacers Included

8"



Removable rear back cover supports tweeter mounting

### APMP-800ETW

#### MULTIPURPOSE SPEAKER ENCLOSURE FOR 8" SPEAKER

- Opening Diameter: 8"
- Durable and Weatherproof ABS Material
- Empty Enclosure with Slotted Mounting Holes for Different Bolt Patterns
- Directional Aiming 22°
- Cast Aluminum Bracket
- Fits Mounting Tube Sizes: 1-13/16", 2-1/4", 2-3/8", 2-1/2", 2-5/8"
- Removable Cable Grommet for Easy Addition of LED Wiring
- Connection: Satin Nickel Plated Brass Binding Posts
- Enclosure Dimensions: 8.5" x 9.8"
- **Made to fit all Audiopipe APMP speakers. Additional ring included to fit all other 8" speakers.**



Mounting Spacers Included

8"



Removable rear back cover supports tweeter mounting

### APMP-1000ETW

#### MULTIPURPOSE SPEAKER ENCLOSURE FOR 10" SPEAKER

NEW

- Opening Diameter: 10"
- Durable and Weatherproof ABS Material
- Empty Enclosure with Slotted Mounting Holes for Different Bolt Patterns
- Directional Aiming 22°
- Cast Aluminum Bracket
- Fits Mounting Tube Sizes: 1-13/16", 2-1/4", 2-3/8", 2-1/2", 2-5/8"
- Removable Cable Grommet for Easy Addition of LED Wiring
- Connection: Satin Nickel Plated Brass Binding Posts
- Enclosure Dimensions: 10.6" x 13.7"
- **Made to fit all Audiopipe APMP speakers. Additional ring included to fit all other 10" speakers.**



Mounting Spacers Included

10"



Removable rear back cover supports tweeter mounting



## APMP-6002SP

MULTIPURPOSE COMPACT SPEAKER ENCLOSURE FOR 6" SPEAKER

**NEW**

- 6" Wakeboard Speaker Enclosure
- Opening Diameter: 6" Speaker
- Material: Tough ABS, weather-proof empty enclosures with slotted mounting holes for different bolt patterns
- Directional Aiming: -22°
- Cast Aluminum Bracket
- Fits Mounting Tube Sizes: 1-13/16", 2-1/4", 2-3/8", 2-1/2", 2-5/8"
- Removable Cable Grommet for Easy Addition of LED Wiring
- Connection: Satin nickel plated brass binding posts
- Enclosure Dimensions: 7.1" x 5.6"

**Made to fit all Audiopipe APMP speakers. Additional ring included to fit all other 6" speakers.**



Mounting Spacers  
Included



Removable rear  
back cover supports  
tweeter mounting



## APMP-8002SP

MULTIPURPOSE COMPACT SPEAKER ENCLOSURE FOR 8" SPEAKER

**NEW**

- 8" Wakeboard Speaker Enclosure
- Opening Diameter: 6" Speaker
- Material: Tough ABS, weather-proof empty enclosures with slotted mounting holes for different bolt patterns
- Directional Aiming: -22°
- Cast Aluminum Bracket
- Fits Mounting Tube Sizes: 1-13/16", 2-1/4", 2-3/8", 2-1/2", 2-5/8"
- Removable Cable Grommet for Easy Addition of LED Wiring
- Connection: Satin nickel plated brass binding posts
- Enclosure Dimensions: 10.6" x 6.3"

**Made to fit all Audiopipe APMP speakers. Additional ring included to fit all other 8" speakers.**



Mounting Spacers  
Included



Removable rear  
back cover supports  
tweeter mounting



## APMP-60IWETW

MULTIPURPOSE COMPACT SPEAKER ENCLOSURE FOR 6" SPEAKER

**NEW**

- 6" Wakeboard Speaker Enclosure
- Enclosures for mounting 6-inch speakers
- Material: Tough ABS, weather-proof empty enclosures with slotted mounting holes for different bolt patterns
- Directional Aiming: -22°
- Cast Aluminum Bracket
- Fits Mounting Tube Sizes: 1-13/16", 2-1/4", 2-3/8", 2-1/2", 2-5/8"
- Removable Cable Grommet for Easy Addition of LED Wiring
- Connection: Satin nickel plated brass binding posts
- Enclosure Dimensions: 7" x 8.8"
- **Made to fit all Audiopipe APMP speakers. Additional ring included to fit all other 6" speakers.**

6"



Mounting Spacers Included



Removable rear back cover supports tweeter mounting

## APMP-80IWETW

MULTIPURPOSE COMPACT SPEAKER ENCLOSURE FOR 8" SPEAKER

**NEW**

- 8" Wakeboard Speaker Enclosure
- Enclosures for mounting 8-inch speakers
- Material: Tough ABS, weather-proof empty enclosures with slotted mounting holes for different bolt patterns
- Directional Aiming: -22°
- Cast Aluminum Bracket
- Fits Mounting Tube Sizes: 1-13/16", 2-1/4", 2-3/8", 2-1/2", 2-5/8"
- Removable Cable Grommet for Easy Addition of LED Wiring
- Connection: Satin nickel plated brass binding posts
- Enclosure Dimensions: 8.5" x 10"
- **Made to fit all Audiopipe APMP speakers. Additional ring included to fit all other 8" speakers.**

8"



Mounting Spacers Included



Removable rear back cover supports tweeter mounting

## APMP-100IWETW

MULTIPURPOSE COMPACT SPEAKER ENCLOSURE FOR 10" SPEAKER

**NEW**

- 10" Wakeboard Speaker Enclosure
- Enclosures for mounting 10-inch speakers
- Material: Tough ABS, weather-proof empty enclosures with slotted mounting holes for different bolt patterns
- Directional Aiming: -22°
- Cast Aluminum Bracket
- Fits Mounting Tube Sizes: 1-13/16", 2-1/4", 2-3/8", 2-1/2", 2-5/8"
- Removable Cable Grommet for Easy Addition of LED Wiring
- Connection: Satin nickel plated brass binding posts
- Enclosure Dimensions: 10.62" x 13.7"
- **Made to fit all Audiopipe APMP speakers. Additional ring included to fit all other 10" speakers.**

10"



Mounting Spacers Included



Removable rear back cover supports tweeter mounting



Colorize it with:  
SWS-TWW68-LED





## APMP-H505TWR

6" WEATHER PROOF COMPRESSION DRIVER WAKEBOARD TOWER

**NEW**

- Material: Tough ABS, weather-proof enclosures
- Cast Aluminum Bracket, Directional Aiming-22°
- Fits Mounting Tube Sizes: 1-1/2", 1-13/16", 2-1/4", 2-3/8", 2-1/2", 2-5/8"
- Removable Cable Grommet for Easy Addition of LED Wiring
- Connection: Satin nickel plated brass binding posts
- Enclosure Dimensions: Ø180x156mm
- 160 Watts Power (P.M.P.O.)
- 80 Watts Power (R.M.S.)
- Frequency Response: 1800-20KHz
- Sensitivity: 108dB
- Impedance: 80hms
- Titanium Diaphragm. 2" Kapton voice coil
- 134mmx17mm Ferrite Magnet, 35 Oz, Magnet
- High Frequency ABS Horn
- Exit Throat Size: 2"
- High Pass Crossover (5,000Hz) is included



**250  
Watts**



Mounting Spacers  
Included



Removable rear  
back cover supports  
tweeter mounting

## APMP-ETW-FLTMNT

## APMP-WETW-FLTMNT


UNIVERSAL FLAT MOUNT BRACKET

**NEW**

- Die-cast solid aluminum
- 360 degree rotational bracket
- Tilt adjustable:  
-18, -36, 0, 18, 36 degrees



**Clockwise:**  
-36° and -18°



0°



**Anticlockwise:**  
36° and 18°



### SUITABLE FOR

APMP-600ETW  
APMP-601WETW  
APMP-60025P

APMP-H505TWR  
APMP-800ETW  
APMP-801WETW

APMP-80025P  
APMP-1000ETW

## ASB-8002CF

### AMPLIFIED WIRELESS POWERSPORT SOUNDBAR

- Fully integrated 300 Watts Class D Amplifier
- Frequency Response: 60-20Khz
- 10 speakers powersport soundbar: 6 pcs Full range marine fiber cone speakers 2 pcs Full range PP con speakers 2 pcs Titanium dome tweeters
- Heavy duty extruded aluminum water tight housing
- Built in wireless connectivity with source control
- Complete wiring harness include
- Dimensions: 34" x 4" x 3.8" (L x W x H)
- Mounting hardware included
- **Wireless music streaming up to 33ft. withstand immersion**



**Fits Mounting Tube Sizes:**  
2 1/4", 2 3/8", 2 1/2", 2 5/8"



## ASB-8001PV

### PASSIVE POWERSPORT SOUNDBAR

**NEW**

- 10 speakers powersport soundbar: 6 pcs Full range marine fiber cone speakers 2 pcs Full range PP con speakers 2 pcs Titanium dome tweeters
- Heavy duty extruded aluminum water tight housing
- Dimensions: 34" x 4" x 3.8" (L x W x H)
- Mounting hardware included



**Fits Mounting Tube Sizes:**  
2 1/4", 2 3/8", 2 1/2", 2 5/8"








### APTV-1000.2

#### WATERPROOF 2 CHANNEL FULL RANGE CLASS D AMPLIFIER

- Amplifier Power: (RMS) 100Wx2 (4Ω)/160Wx2 (2Ω)  
320Wx1 (4Ω Bridge) (fo=1KHz THD+N=1%)
- High Pass/Low Pass filter: 12dB/oct
- THD:  $\leq 0.08\%$
- Frequency response: 20Hz-20KHz
- Input range: 250mV-10V
- Signal to noise:  $\geq 90\text{dBA}$
- Working Voltage: DC14.4V (Voltage range 10-16V)
- Dimensions: 192mm x 89mm x 40mm

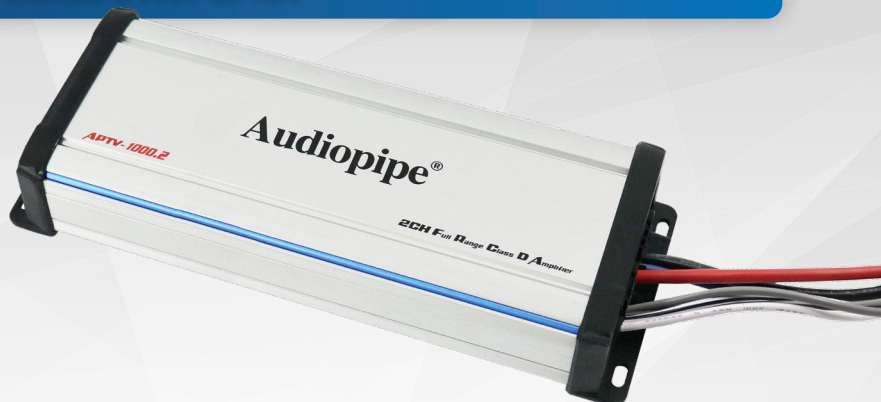

### APTV-600.4

#### WATERPROOF 4 CHANNEL FULL RANGE CLASS D AMPLIFIER

- Amplifier Power: (RMS) 60Wx4 (4Ω)/100Wx4 (2Ω)  
200Wx2 (4Ω Bridge) (fo=1KHz THD+N=1%)
- High Pass/Low Pass filter: 12dB/oct
- THD:  $\leq 0.08\%$
- Frequency response: 20Hz-20KHz
- Input range: 200mV-10V
- Signal to noise:  $\geq 90\text{dBA}$
- Working Voltage: DC14.4V (Voltage range 10-16V)
- Dimensions: 217mm x 89mm x 40mm



### APTV-1000.4

#### WATERPROOF 4 CHANNEL FULL RANGE CLASS D AMPLIFIER

- Amplifier Power: (RMS) 100Wx4 (4Ω)/150Wx4 (2Ω)  
280Wx2 (4Ω Bridge) (fo=1KHz THD+N=1%)
- High Pass/Low Pass filter: 12dB/oct
- THD:  $\leq 0.08\%$
- Frequency response: 20Hz-20KHz
- Input range: 250mV-10V
- Signal to noise:  $\geq 90\text{dBA}$
- Working Voltage: DC14.4V (Voltage range 10-16V)
- Dimensions: 277mm x 89mm x 40mm



### APTV-1100.6

#### WATERPROOF 6 CHANNEL FULL RANGE CLASS D AMPLIFIER

**NEW**

- Output Power (RMS)@ 1% 1 KHz 14.4  
Stereo @ 4 Ohms: 6 x 100W  
Stereo @ 2 Ohms: 6 x 160W
- Mono@ 2 Ohms: 3 x 320W
- Frequency Response (-3dB): 12Hz- 40KHz
- Crossover Range High and Low Pass:  
40Hz – 400Hz @ 12dB/OCT
- S/N Ratio (A WTG):  $> 85\text{dB}$
- Input Sensitivity: 0.25V-10V
- Working Voltage: 10V – 16V
- Waterproof Level: IP67



## APMRE-4150D

FULL RANGE CLASS D MINI DESIGN 4 CHANNEL MOSFET MARINE AMPLIFIER

- RMS @ 4 Ohm (<1% DISTORTION): 4 x 150w
- RMS @ 2 Ohm (<1% DISTORTION): 4 x 200w
- Maximum Power Output: 2 x 360W
- Frequency Response: 50Hz - 1.2kHz
- Input Level: 0.2V - 6V
- S/N Ratio: >80dB
- THD: <1%
- Dimensions (L x W x H): 6.3" x 2.2" x 12"




**2500**  
Watts

With remote  
bass knob and  
built-in cooling fan

## APMRE-4095

FULL RANGE CLASS D MINI DESIGN 4 CHANNEL MOSFET MARINE AMPLIFIER

- RMS @ 4 Ohm (<1% DISTORTION): 4 x 100w
- RMS @ 2 Ohm (<1% DISTORTION): 4 x 130w
- Maximum Power Output: 2 x 360W
- Frequency Response: 50Hz - 1.2kHz
- Input Level: 0.2V - 6V
- S/N Ratio: >80dB
- THD: <1%
- Dimensions (L x W x H): 6.3" x 2.2" x 9.5"

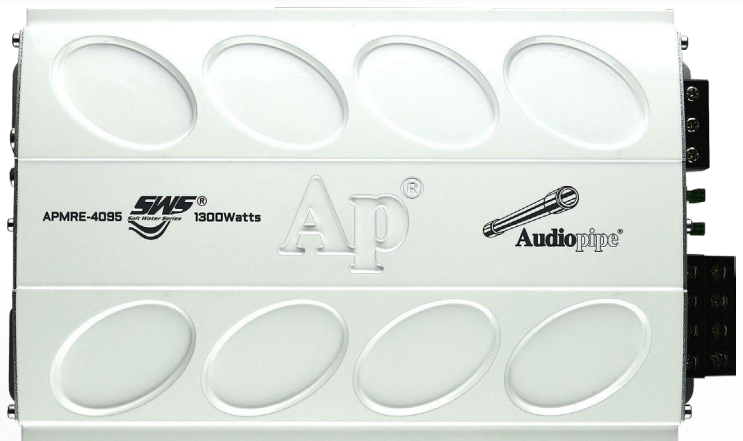

**1300**  
Watts

With remote  
bass knob and  
built-in cooling fan



## APSR-8100GS

8 CHANNEL CLASS D MARINE AMPLIFIER

**NEW**

- Output powers (RMS) @1% 1KHz 14.4V
- Stereo @4 ohms: 8 x 100 Watts @ 80A
- Stereo @2 ohms: 8 x 150 Watts @ 139A
- Mono @4 ohms: 4 x 300 Watts @ 139A
- Frequency response: -3db - 10Hz~20KHz
- Crossover Range High and Low Pass: 30Hz ~ 300Hz 12dB/Octave
- Bass boost: 0 ~ 12dB @ 27Hz ~ 110Hz
- S/N Ratio (A wtg): > 85dB
- Input Sensitivity: 0.2V ~ 6V
- Overvolt Protection: 16.5V
- Under-voltage protection: 9V
- Dimension: 15.9" x 8.4" x 2.5"

**3200  
Watts**



Includes remote  
bass knob



## APSR-6185GS

6 CHANNEL CLASS D MARINE AMPLIFIER

**NEW**

- Output powers (RMS) @1% 1KHz 14.4V
- Stereo @4 ohms: 6 x 150 Watts @ 73A
- Stereo @2 ohms: 6 x 250 Watts @ 138A
- Mono @4 ohms: 3 x 500 Watts @ 138A
- Frequency response: -3db - 10Hz~10KHz
- Crossover Range High and Low Pass: 30Hz ~ 300Hz 12dB /Octave
- Bass boost: 0 ~ 12dB @ 27Hz ~ 110Hz
- S/N Ratio (A wtg): >85dB
- Input Sensitivity: 0.2V ~ 6V
- Overvolt Protection: 16.5V
- Under-voltage protection: 8.5V
- Dimension: 13.5" x 8.4" x 2.5"

**3000  
Watts**



Includes remote  
bass knob



## APSR-4120GS

4 CHANNEL CLASS D MARINE AMPLIFIER

**NEW**

- Output power (RMS) @ 1% 1 KHz 14.4V
- Stereo @ 4 OHMS: 4 x 120 Watts @ 39A
- Stereo @ 2 OHMS: 4 x 195 Watts @ 71A
- Mono @ 4 OHMS: 2 x 390 Watts @ 71A
- Frequency Response: -3dB - 10Hz-20KHz
- Crossover range high and low pass: 30Hz-300Hz 12dB / Octave
- Bass boost: 0-12dB @ 27Hz-110Hz
- S/N ratio (A WTG): >85dB
- Input sensitivity: 0.2V-6V
- Overvolt protection: 16.5V
- Under-voltage protection: 8.5V
- Dimentsions: 11.1" x 8.4" x 2.5"

**1500  
Watts**



Includes remote  
bass knob



## NL-8LESP-KT

### WIRELESS RGB LED CONTROLLER AND WIRING KIT

The NL-8LESP-KT Wireless RGB LED Controller and Wiring Kit allows you to create unique and custom LED lighting configurations for your boat. Easily connect up to 8 LED Strips, LED Speaker Rings, or Led Loudspeakers to the RGB LED Controller to create a synchronized and stunning LED illuminated display for your boat.

- (1) Wireless RGB LED Controller
- (8) 4-Pins 12ft Black Extension Cables
- (6) Y (1 to 2 Way) 8.5in Splitters
- Voltage: 12V DC
- Current: 8 Amps
- The controller uses advanced PWM (Pulse Width Modulation) digital control technology for precise and accurate color management. The controller can ONLY be operated using the LED phone app. This app is available for both IOS and Android.
- Water Resistant



Easily connects to:

#### LED SPEAKERS



#### LED STRIPS




#### LED SPEAKER RINGS



### PIPEDREAM LED APP

Wirelessly control the color, strobe pattern and speed of your LED's with the Pipedream LED mobile application available on the Apple App Store and Google Play for Android.

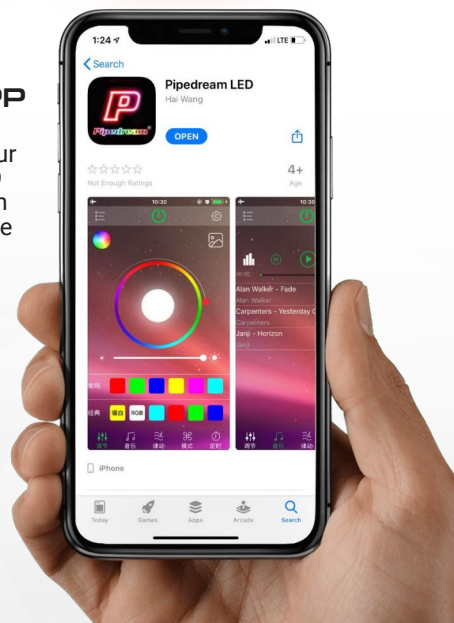



## NL-8LESP-EXT

EXTENSION CABLE LED WIRING

**NEW**

- 4 Pins
- 12ft Length
- Color: Black
- Waterproof



## NL-8LESP-Y85

1 TO 2 WAY "Y" SPLITTER LED WIRING

**NEW**

- 4 Pins
- 12ft Length
- Color: Black
- Waterproof



Easily connects to:

**LED SPEAKERS**



**LED STRIPS**



**LED SPEAKER RINGS**



## NL-RI6550RGB

## NL-RI8050RGB



## NL-RI8850RGB

## NL-RI1050RGB

## NL-RIAPSW-10RGB

RGB LED SPEAKER RINGS



- Available in sizes: 6.5", 8", 10", 12"
- Durable Acrylic 12 mm Thickness
- Handle all outdoor weather environments
- LEDs are pre-mounted and ready to install
- Rings are supplied with a weather proof connector
- Outer edges are frosted for a consistent glow effect
- **Sold in pairs**

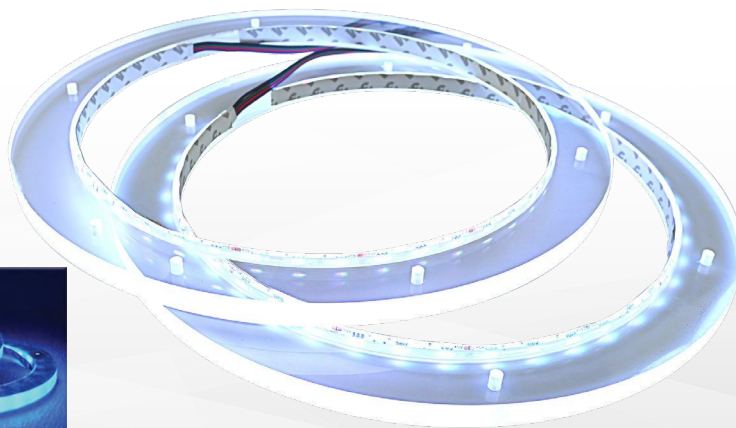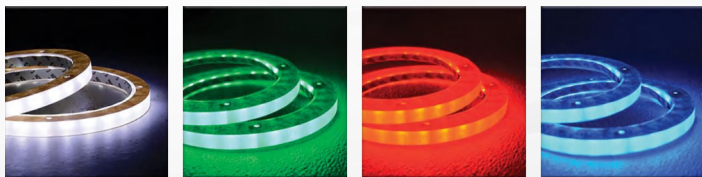

## NL-RIAPMP-6 RGB

### 8" RGB LED SPEAKER RINGS


- Smoke colored housing case
- Durable acrylic 12mm thickness
- Handles all outdoor weather conditions
- LEDs are pre-mounted and ready to install
- Outer edges are frosted for a consistent glow effect
- Inner ring diameter: 5.8"
- Outer ring diameter: 7.1"
- Made to fit APMP 6" Liquid Metal Basket and APMP 6" Diecast Baskets
- **Sold in pairs**

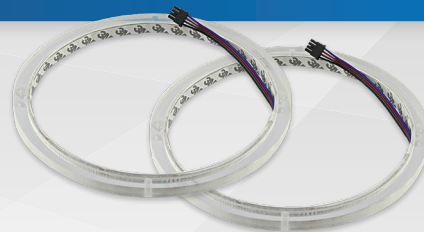

## NL-RIAPMP-8 RGB

### 8" RGB LED SPEAKER RINGS


- Smoke colored housing case
- Durable acrylic 12mm thickness
- Handles all outdoor weather conditions
- LEDs are pre-mounted and ready to install
- Outer edges are frosted for a consistent glow effect
- Inner ring diameter: 7-1/4"
- Outer ring diameter: 8-1/2"
- Made to fit APMP 8" Liquid Metal Basket and APMP 8" Diecast Baskets
- **Sold in pairs**



## NL-RIAPMP-10 RGB

### 10" RGB LED SPEAKER RINGS


- Smoke colored housing case
- Durable acrylic 12mm thickness
- Handles all outdoor weather conditions
- LEDs are pre-mounted and ready to install
- Outer edges are frosted for a consistent glow effect
- Inner ring diameter: 9.2"
- Outer ring diameter: 10.6"
- Made to fit APMP 10" Liquid Metal Basket and APMP 10" Diecast Baskets
- **Sold in pairs**



## NL-RIAPMP-12 RGB

### 12" RGB LED SPEAKER RINGS

- Smoke colored housing case
- Durable acrylic 12mm thickness
- Handles all outdoor weather conditions
- LEDs are pre-mounted and ready to install
- Outer edges are frosted for a consistent glow effect
- Inner ring diameter: 11.1"
- Outer ring diameter: 12.7"
- Made to fit APMP 12" Liquid Metal Basket and APMP 12" Diecast Baskets
- **Sold in pairs**






## APSW-6000BTU

3" MULTIMEDIA MARINE HEADUNIT WITH HIGH DEFINITION LCD DISPLAY

**NEW**

The APSW-6000BTU is a multimedia marine headunit with a 3" bright white LED illuminated LCD display for optimum viewing, even in full sun. This compact unit is easily mounted in a 3" round mounting hole and is IP66 rated and element proof to protect against dust, UV, temperature, water, corrosion & vibration.

- Radio (AM/FM)
- 18FM / 12AM Presets
- Wireless Music Streaming
- MP3 & WMA music playback
- USB cell phone charging
- 3" High Definition LCD Display (Segment Type)
- Bass/Treble/Balance/Fader
- Waterproof: IP66 rated
- Waterproof Male + Female Wireharness for installation
- UV coated for both black trim ring + black panel
- **Protective cover included**




## APSW-7500BTU

3" MULTIMEDIA MARINE HEADUNIT WITH HIGH DEFINITION TFT DISPLAY

**NEW**

The APSW-7500BTU is a multimedia marine headunit with a 3" full color TFT LCD display for optimum viewing. Even in full sun, it's perfect for any marine application. The advantages of TFT LCD are as follows: less energy consumption, visibility is sharper and has superb quality, physical design, response time, and less eye strain. This compact unit is easily mounted in a 3" round mounting hole and is IP66 rated and element proof to protect against dust, UV, temperature, water, corrosion & vibration.



- Radio (AM/FM)
- 18FM / 12AM Presets
- Wireless Music Streaming
- MP3 & WMA music playback
- USB cell phone charging
- 3" High Definition LCD Display (Segment Type)
- Bass/Treble/Balance/Fader
- Waterproof: IP66 rated
- Waterproof Male + Female Wireharness for installation
- UV coated for both black trim ring + black panel
- **Protective cover included**



## AP-BTM-1750IP

### BLUETOOTH AUDIO RECEIVER

- Blue/White - Remote Out
- Red - (B+) - Power 12V
- Black - (B-) - Ground
- RCA - Audio Output

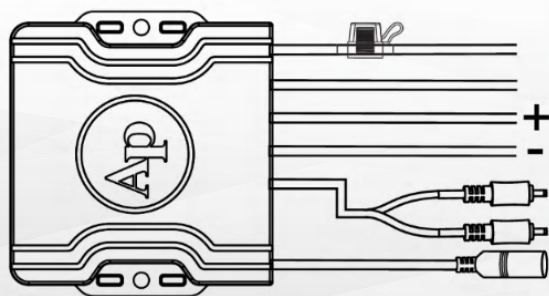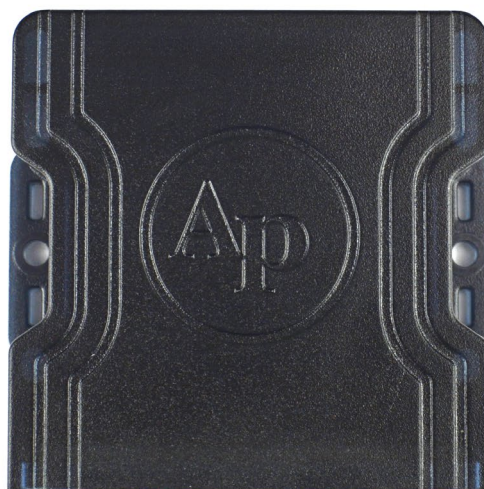


- Yellow- (+12V) Constant power / Amarillo- (+12V Potencia constante)**
- Blue/White Stripe - Remote Out / Raya azul/blanca - Salida remota**
- + Red- (+12V) Remote in/Switched Power / Rojo- (+12V) Entrada remota/12V conmutada**
- Black- (-12V) Ground / Negra- (-12V) - Tierra**
- White RCA - Left Output / RCA blanca - Salida izquierda**
- Red RCA - Right Output / RCA rojo - Salida derecha**
- Aux in / Entrada auxiliar**



## APMR-300ANT

### 56" MARINE ANTENNA

- Application: AM/FM
- Antenna in White ABS Case: 32 cm (L) x 3.2 cm (W)
- Coaxial Cable 75 Ohms: Length 56" (1422 mm)
- Motorola Type Connector

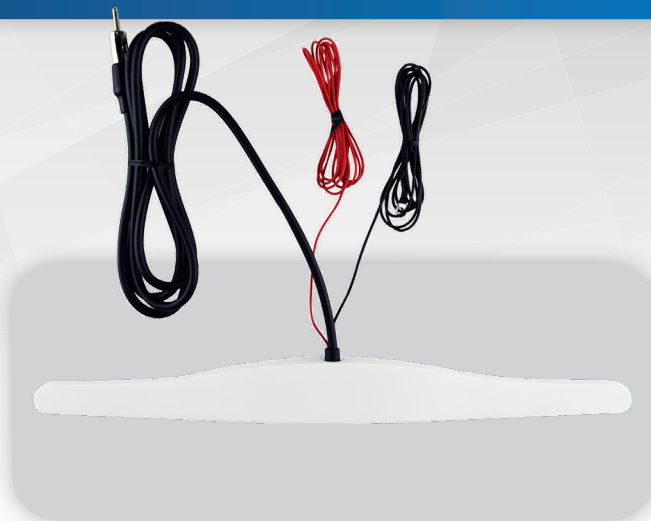

## APMR-100ANT

### 40" MARINE ANTENNA

- Application: AM/FM
- Application: AM/FM
- Frequency: 550-1600 kHz
- Length: 40" (1016 mm)
- Motorola Type Connector



## PMC-3001

### MARINE RADIO COVER

- Smoke colored housing case
- Recessed design accommodates most din size head units
- Smoke colored fold-down door with rubber seal
- Spring loaded flip door
- Support tabs, secures and locks in place radio sleeve
- Hinge can be mounted up or down
- Concealed stainless steel mounting hardware included
- EVA foam mounting gasket
- High-Temp and UV-Resistant ABS polymer construction
- Dimension (WxHxD): 9" x 4.1" x 1.92"



### APSW-3750

#### 3-3/4" ABS PLASTIC MARINE TWEETER

- 3 3/4" ABS Plastic Horn with 1" Super Bullet Tweeter
- 1" High Temperature Kapton Voice Coil
- 25 Oz Magnet Structure
- 150 Watts RMS/300 Watts Peak Power
- 8 Ohms Impedance
- Ferro Fluid Enhanced Voice Coil
- Sensitivity: 99dB
- Frequency Response: 2K-25KHz
- **Sold individually**

**300**  
Watts

3-3/4"



### APSW-3755

#### 3-3/4" ABS PLASTIC MARINE TWEETER

- 3 3/4" ABS Plastic Horn with 1" Super Bullet Tweeter
- 1" High Temperature Kapton Voice Coil
- 25 Oz Magnet Structure
- 150 Watts RMS/300 Watts Peak Power
- 8 Ohms Impedance
- Ferro Fluid Enhanced Voice Coil
- Sensitivity: 99dB
- Frequency Response: 2K-25KHz
- **Sold individually**

**300**  
Watts

3-3/4"



### APSW-4032BLK

#### 4" COAXIAL 2-WAY MARINE LOUDSPEAKERS

- 100 Watts Power (P.M.P.O.)
- 50 Watts Power (R.M.S.)
- Frequency Response: 45-20KHz
- Sensitivity: 90dB
- Rubber Surround Piano Black IMPP Cone
- Titanium Dome Diaphragm High Performance Tweeter
- Mounting Depth: 56mm (2 1/4")
- Impedance: 4 Ohms
- 15 Oz Magnet
- **Sold in pairs**

**100**  
Watts

4"





## APSW-4032WHT

### 4" COAXIAL 2-WAY MARINE LOUDSPEAKERS

- 100 Watts Power (P.M.P.O.)
- 50 Watts Power (R.M.S.)
- Frequency Response: 45-20KHz
- Sensitivity: 90dB
- Rubber Surround Piano Black IMPP Cone
- Titanium Dome Diaphragm High Performance Tweeter
- Mounting Depth: 56mm (2 1/4")
- Impedance: 4 Ohms
- 15 Oz Magnet
- **Sold in pairs**

**100**  
Watts



## APSW-6932

### 6" X 9" COAXIAL 2-WAY MARINE LOUDSPEAKERS

- 300 Watts Power (P.M.P.O.)
- 150 Watts Power (R.M.S.)
- Frequency Response: 40-20 KHz
- Sensitivity: 93 db
- Rubber Surround Piano Black IMPP Cone
- Titanium Dome Diaphragm High Performance Tweeter
- Mounting Depth: 92mm (3 5/8")
- 20 Oz Magnet
- **Sold in pairs**

**300**  
Watts



## APSW-6032

### 6.5" COAXIAL 2-WAY MARINE LOUDSPEAKERS

- 200 Watts Power (P.M.P.O.)
- 100 Watts Power (R.M.S.)
- Frequency Response: 45-20KHz
- Sensitivity: 90dB
- Rubber Surround Piano Black IMPP Cone
- Titanium Dome Diaphragm High Performance Tweeter
- Mounting Depth: 70mm (2 3/4")
- 15 Oz Magnet
- **Sold in pairs**

**200**  
Watts



## APSW-8032T

### 8" COAXIAL 2-WAY MARINE LOUDSPEAKERS

- 350 Watts Power (P.M.P.O.)
- 175 Watts Power (R.M.S.)
- Frequency Response: 45-25KHz
- Sensitivity: 90dB
- Rubber Surround Piano Black IMPP Cone
- Titanium Dome Diaphragm High Performance Tweeter
- Mounting Depth: 70mm (3 1/2")
- 22 Oz Magnet
- **Sold in pairs**

**350**  
Watts



## APSW-1032V

### 10" MARINE SUBWOOFER

- 600 Watts Power (P.M.P.O.)
- 300 Watts Power (R.M.S.)
- Frequency response: 32 - 2,500Hz
- Sensitivity: 91dB
- 2.5" TIL voice coil
- Rubber surround piano black IMPP cone
- Mounting depth: 5-1/8"
- Impedance: 40HMS
- 56Oz magnet
- **Sold in pairs**

**600**  
Watts



## APMP-1200MG

### 12" MARINE SUBWOOFER

**NEW**

- 1000 Watts Power (P.M.P.O.)
- 500 Watts Power (R.M.S.)
- Frequency response: 25 - 3,500Hz
- Sensitivity: 88dB
- 2.55" Kapton Voice Coil
- Liquid Metal Plastic Strong as Steel Basket
- Mounting depth: 5-5/8"
- Impedance: 40HMS
- 750z magnet

**1000**  
Watts







### APSW-62GM

#### 6.5" COAXIAL MARINE SPEAKER ENCLOSURE

- Fits a 6 1/2" Speaker
- Color: White
- This Fiberglass Speaker box is a perfect fit under most gunnels
- 13.5 x 8 x 4 Inches
- Speaker sold separately
- **Sold individually**



### APMG-10WH

### APMG-10TI

### APMG-10BK

#### 10" SPORT REPLACEMENT GRILL

- Fits APSW-1032V 10" Subwoofer
- Color: White/Titanium/Black
- Durable ABS Plastic Material
- **Sold individually**



### APMP-CV8

#### 8" MARINE SPEAKER COVER

- Fits 8" speakers
- UV Protected durable ABS plastic
- Waterproof
- **Sold individually**



## Marine Speaker Cables

TMPC-4-100TCB    TMPC-4-100TCW  
TMPC-4-100TCR    TMPC-4-100TCY

4 AWG - 100FT MARINE POWER CABLE

**NEW**

- 4 Gauge
- 100 Ft. Roll
- Sheathed double conductor marine power cable
- Each copper strand is tinned to withstand the harshest environment
- Resists salt water, battery acid, oil, gasoline, heat, abrasion, UV radiation, and cleaning chemicals
- Available in black, red, yellow and white
- Sold individually

**100      4**  
Feet    Gauge



TMPC-8-100TCB    TMPC-8-100TCW  
TMPC-8-100TCR    TMPC-8-100TCY

8 AWG - 100FT MARINE POWER CABLE

**NEW**

- 8 Gauge
- 100 Ft. Roll
- Sheathed double conductor marine power cable
- Each copper strand is tinned to withstand the harshest environment
- Resists salt water, battery acid, oil, gasoline, heat, abrasion, UV radiation, and cleaning chemicals
- Available in black, red, yellow and white
- Sold individually

**100      8**  
Feet    Gauge



TMPC-0-100TCB    TMPC-0-100TCW  
TMPC-0-100TCR    TMPC-0-100TCY

0 AWG - 100FT MARINE POWER CABLE

**NEW**

- 0 Gauge
- 100 Ft. Roll
- Sheathed double conductor marine power cable
- Each copper strand is tinned to withstand the harshest environment
- Resists salt water, battery acid, oil, gasoline, heat, abrasion, UV radiation, and cleaning chemicals
- Available in black, red, yellow and white
- Sold individually

**100      0**  
Feet    Gauge





**TMSC-12-250TCW**  
**TMSC-12-50TCW**  
**TMSC-12-25TCW**

**12 OFC - 250FT/SOFT/25FT MARINE SPEAKER CABLE**

**NEW**

- 12 Gauge
- Sheathed double conductor marine speaker cable
- Each copper strand is tinned to withstand the harshest environment
- Resists salt water, battery acid, oil, gasoline, heat, abrasion, UV radiation, and cleaning chemicals
- Available in 250FT, 50FT, OR 25FT
- Sold individually

**250/50/25** **12**  
**Feet Gauge**



**TMSC-14-250TCW**  
**TMSC-14-50TCW**

**14 OFC - 250FT/SOFT MARINE SPEAKER CABLE**

**NEW**

- 14 Gauge
- Sheathed double conductor marine speaker cable
- Each copper strand is tinned to withstand the harshest environment
- Resists salt water, battery acid, oil, gasoline, heat, abrasion, UV radiation, and cleaning chemicals
- Available in 250FT and 50FT
- Sold individually

**250/50** **14**  
**Feet Gauge**



**TMSC-16-500TCW**  
**TMSC-16-50TCW**

**16 OFC - 500FT/SOFT MARINE SPEAKER CABLE**

**NEW**

- 16 Gauge
- Sheathed double conductor marine power cable
- Each copper strand is tinned to withstand the harshest environment
- Resists salt water, battery acid, oil, gasoline, heat, abrasion, UV radiation, and cleaning chemicals
- Available in 500FT and 50FT
- Sold individually

**500/50** **16**  
**Feet Gauge**



## Marine Speaker Cables

### TMSC-18-500TCW TMSC-18-50TCW

18 OCF - 500/SOFT MARINE SPEAKER CABLE

**NEW**

- 18 Gauge
- Sheathed double conductor marine speaker cable
- Each copper strand is tinned to withstand the harshest environment
- Resists salt water, battery acid, oil, gasoline, heat, abrasion, UV radiation, and cleaning chemicals
- Available in 500FT and 50FT
- Sold individually

**500/50**      **18**  
Feet      Gauge



### TCBL-216-250TCC TCBL-216-100TCC

16 OCF SPEAKER CABLE WITH PVC JACKET

**NEW**

- 16 Gauge
- Marine grade cooper cable insulated with pvc jacket with excellent flexibility
- Use this wire to obtain a superior quality when you connect speakers
- Thickness: 16 gauge
- Resists salt water, battery acid, oil, gasoline, heat, abrasion, uv radiation, and cleaning chemicals
- Available in 250FT and 100FT
- Sold individually

**250/100**      **16**  
Feet      Gauge



### TCBL-214-250TCC TCBL-214-100TCC

14 OCF SPEAKER CABLE WITH PVC JACKET

**NEW**

- 14 Gauge
- Marine grade cooper cable insulated with pvc jacket with excellent flexibility
- Use this wire to obtain a superior quality when you connect speakers
- Thickness: 14 gauge
- Resists salt water, battery acid, oil, gasoline, heat, Abrasion, uv radiation, and cleaning chemicals
- Available in 250FT and 100FT
- Sold individually

**250/100**      **14**  
Feet      Gauge





## TMSC-16XSL-250

## TMSC-16XSL-100

16 OCF SPEAKER CABLE WITH RGB PLUS WHITE

**NEW**

- 16 Gauge
- 100% OFC Copper
- 16AWG Speaker Cable
- 20AWG RGB plus White
- Each copper strand is tinned to withstand the harshest environment
- Resists salt water, battery acid, oil, gasoline, heat, abrasion, UV radiation, and cleaning chemicals
- Available in 250FT and 100FT
- Sold individually

**250/100**  
Feet

**16**  
Gauge



## MSC-18-50TC

## MSC-16-25TC

AWG FLEXIBLE PVC TIN PLATED COPPER OFC SPEAKER WIRE

- **MSC-18-50TC: 18 Gauge / 50FT**
- **MSC-16-25TC: 16 Gauge / 25FT**
- Color: White
- Sheathed double conductor marine speaker wire
- Each copper strand is tinned to withstand the harshest environment
- Resists salt water, battery acid, oil, gasoline, heat, abrasion, UV radiation, and cleaning chemicals
- Sold individually

**50/25**  
Feet

**18-16**  
Gauge



## Marine Speaker Wire

IP-2RCA-3      IP-2RCA-17  
IP-2RCA-6      IP-2RCA-25  
IP-2RCA-12

### OXYGEN FREE 2 CHANNEL MARINE GRADE RCA AUDIO CABLES

- Audiopipe Marine RCA audio cables conveniently connect equipment such as; marine head units, amplifiers and audio processors.
- UV protected white PVC jacket is flexible and make our cables easy to route through tight spaces.
- Twisted-pair arrangement for outstanding sound transfer and superior noise reduction.
- Available in 3', 6', 12', 17', 25'
- Sold individually



IP-YF2M-06  
IP-YM2F-06

### OXYGEN FREE 2 CHANNEL MARINE GRADE "Y" RCA AUDIO CABLES

- Audiopipe Marine RCA audio cables conveniently connect equipment such as; marine head units, amplifiers and audio processors.
- UV protected white PVC jacket is flexible and make our cables easy to route through tight spaces.
- Twisted-pair arrangement for outstanding sound transfer and superior noise reduction.
- Available in "Male to Female", and "Female to Male"
- Sold individually





## PKMB-1500

### 1500 WATT MARINE GRADE AMPLIFIER INSTALLATION KIT

- 12Ft 2 RCA Plugs to 2 RCA Plug with signal wire
- 10Ft 8 AWG white primary wire
- 10Ft 8 AWG black primary wire
- 60 AMP Breaker
- 25Ft 18 AWG white speaker wire
- Marine Grade Ring Terminal white Color
- Black Spade Terminal Black Color
- Black Spade Terminal White Color
- Butt Splices 2 Pcs
- 10 Assorted Cable Ties
- 3Ft Split Loom Tubing



## PKMB-2100

### 2100 WATT MARINE GRADE AMPLIFIER INSTALLATION KIT

- 12Ft 2 RCA Plugs to 2 RCA Plugs with signal wire
- 10Ft 4 AWG white primary wire
- 10Ft 4 AWG black primary wire
- 100 AMP Breaker
- 25Ft 16 AWG white speaker wire
- Marine Grade Ring Terminal white Color
- Black Spade Terminal Black Color
- Black Spade Terminal White Color
- Butt Splices 2 Pcs
- 10 Assorted Cable Ties
- 3Ft Split Loom Tubing



## IP-MB120A

### MANUALLY RESETTABLE CIRCUIT BREAKER

**NEW**


- 100A, 48V DC Max
- Water resistant
- Ignition protection
- Single lever operation
- Robust 5/16"~18" terminals
- Provide high torque connections
- **Sold individually**



## IS-EC-MT1220BLU IS-EC-MT1220RED

METAL TOGGLE SWITCH WITH BLUE LED AND 6" LEAD WIRE

- Current Rating: 20A, 12V
- 2 Pins
- Blue LED or Red Led
- 6" Lead Wire
- Mount Hole Size: 1/2 Inch



## IS-EC-W1215 CVR IS-EC-W1220 CVR

SPST ON/OFF TOGGLE SWITCH WITH WATERPROOF BOOT CAP COVER

- Applicable for all 12-24 DC Volts Connections
- Heavy-Duty Toggle Switch Suitable for Marine, Industrial, or Automotive Applications
- Made from Sturdy Material that Ensures Long Lasting Durability, Facilitate Easy Installation
- Power: 15A 125VAC or 20A 250VAC
- 2 Pins
- Mount Hole Dimensions: 1/2 Inch



## IS-EC-W1215MC

SPST WATERPROOF MOMENTARY ON TOGGLE SWITCH

- Applicable for all 12 DC volt connections
- Heavy-Duty toggle switch suitable for marine, industrial, or automotive applications
- Made from sturdy material that ensures long lasting durability, facilitate easy installation
- Power: 15A 125VAC
- 2 Pins
- Mount Hole Dimensions: 1/2 Inch




For horns or temporary Lighting. Heavy-duty spade type terminal. 1/2" mounting hole required.



## IS-EP-WS1215 BLU IS-EP-WS1220 BLU IS-EP-WS1215 RED IS-EP-WS1220 RED

ROCKER SWITCH

- Mounting Hole Size: 19mm (5/8 Inch), Switch Rating: 3A/250AC, Switch Combination: 1NO 1NC
- Operation Type: Latching/ Self-Locking [Push it - ON, push it again - OFF]
- Power symbol LED can be on all the time or only when switch is on which depends on how you wire it.

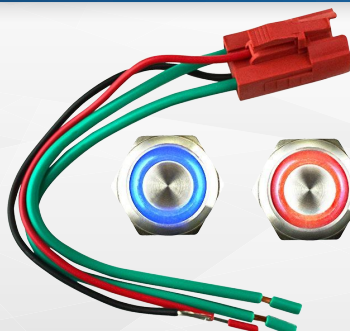

15 AMP / 20 AMP





### IS-EC-WP1213BLACK IS-EC-WP1213RED IS-EC-WP1213BLUE

#### SPST LED ILLUMINATED ON/OFF ROCKER SWITCH

- Current Rating: 10A 12V
- 3 Pins
- Waterproof
- Mounting Diameter: 3/4 Inch



### IS-EC-WP1216BLU IS-EC-WP1216RED IS-EC-WP1216GRN

#### SPST LED ILLUMINATED ON/OFF ROCKER SWITCH

- Current Rating: 16A 12V
- 3 Pins
- Waterproof
- Mounting Diameter: 3/4 Inch



### IS-EP-WB123 BLU IS-EP-WB123 RED

#### WATERPROOF PUSH ON/OFF SWITCH LED INDICATOR

- Mounting Hole Size:  $\Phi 22\text{mm}$  (0.86 Inch), Switch Rating: 3A/250AC, Switch Combination: 1NO 1NC
- Operation Type: Latching/ Self-Locking [Push it - ON, push it again - OFF]
- Power symbol LED can be on all the time or only when switch is on which depends on how you wire it.
- Great for Electric Switch, Relay, Power Button Switch, Critical Lights, Chassis Lamp, Fog Lamps, Door Switch, Led Switch or any circuit controls on over 500,000 cycles.
- High quality metal material & IP65 waterproof protection can be used in wet or dusty environment.
- **Sold individually**



### IS-EP-WS123 BLU IS-EP-WS123 RED

#### WATERPROOF PUSH ON/OFF SWITCH LED INDICATOR

- Mounting Hole Size:  $\Phi 19\text{mm}$  (0.86 Inch), Switch Rating: 3A/250AC, Switch Combination: 1NO 1NC
- Operation Type: Latching/ Self-Locking [Push it - ON, push it again - OFF]
- Power symbol LED can be on all the time or only when switch is on which depends on how you wire it.
- Great for Electric Switch, Relay, Power Button Switch, Critical Lights, Chassis Lamp, Fog Lamps, Door Switch, Led Switch or any circuit controls on over 500,000 cycles.
- High quality metal material & IP65 waterproof protection can be used in wet or dusty environment.
- **Sold individually**



## ECSW-MOU-SIN

### SINGLE MOUNTING PANEL FOR ROCKER SWITCH

- Inner Dimensions: 1" x 2"
- Compatible with all ECSW-RSOF marine grade on/off rocker switches



## ECSW-MOU-MID

### MIDDLE MOUNTING PANEL FOR ROCKER SWITCH

- Inner Dimensions: 1" x 2"
- Combine with CSW-MOU-END to create your own personalized marine panel control center.
- Compatible with all ECSW-RSOF marine grade on/off rocker switches



## ECSW-MOU-END

### END MOUNTING PANEL FOR ROCKER SWITCH

- Inner Dimensions: 1" x 2"
- Combine with ECSW-MOU-END to create your own personalized marine panel control center.
- Compatible with all ECSW-RSOF marine grade on/off rocker switches



## ECSW-MOU-MID

### MIDDLE MOUNTING PANEL FOR ROCKER SWITCH

- Inner Dimensions: 1" x 2"
- Combine with ECSW-MOU-END to create your own personalized marine panel control center.
- Compatible with all ECSW-RSOF marine grade on/off rocker switches



## ECSW-RSOF

### MARINE GRADE ON/OFF SPDT ROCKER SWITCH

- 2 Pins
- 12V 20A DC
- 24V 10A DC
- Flat black
- Sold individually



## ECSW-RSOF-BLU ECSW-RSOF-RED

### MARINE GRADE ON/OFF SPDT ROCKER SWITCH WITH LED INDICATOR

- 3 Pins
- Red or Blue LED Status Indicator
- 12V 20A DC
- 24V 10A DC
- Sold individually





### MRT-2218-4HS

MARINE HEAT SHRINK RING TERMINAL

- 22-18 Gauge
- Red
- Translucent Vinyl Insulator
- Package of 100



**22/18 Gauge**

### MBT-2218-HS

MARINE HEAT SHRINK BUTT CONNECTOR

- 22-18 Gauge
- Red
- Translucent Vinyl Insulator
- Package of 100



**22/18 Gauge**

### MRT-1614-6HS

MARINE HEAT SHRINK RING TERMINAL

- 16-14 Gauge
- Blue
- Translucent Vinyl Insulator
- Package of 100



**16/14 Gauge**

### MBT-1614-HS

MARINE HEAT SHRINK BUTT CONNECTOR

- 16-14 Gauge
- Blue
- Translucent Vinyl Insulator
- Package of 100



**16/14 Gauge**

### MRT-1210-8HS

MARINE HEAT SHRINK RING TERMINAL

- 12-10 Gauge
- Yellow
- Translucent Vinyl Insulator
- Package of 100



**12/10 Gauge**

### MBT-1210-HS

MARINE HEAT SHRINK BUTT CONNECTOR

- 12-10 Gauge
- Yellow
- Translucent Vinyl Insulator
- Package of 100



**12/10 Gauge**

### MQD-2218-250HS

MARINE HEAT SHRINK BUTT  
DISCONNECT CONNECTOR

- 22-18 Gauge
- Red
- Translucent Vinyl Insulator
- Package of 100



**22/18 Gauge**

### MQD-1614-250HS

MARINE HEAT SHRINK BUTT  
DISCONNECT CONNECTOR

- 16-14 Gauge
- Blue
- Translucent Vinyl Insulator
- Package of 100




**16/14 Gauge**

### MBLF-1614HS

MARINE HEAT SHRINK BULLET  
DISCONNECT CONNECTOR

**NEW**

- 16-14 Gauge
- Blue
- Translucent Vinyl Insulator
- Package of 100



**16/14 Gauge**

### MQD-1210-250HS

MARINE HEAT SHRINK BUTT DISCONNECT  
CONNECTOR

- 12-10 Gauge
- Yellow
- Translucent Vinyl Insulator
- Package of 100



**12/10 Gauge**













FOR MORE INFORMATION, PLEASE VISIT YOUR AUTHORIZED AUDIOPIPE DEALER  
[WWW.AUDIOPIPE.COM/AUDIOPIPEMARINE](http://WWW.AUDIOPIPE.COM/AUDIOPIPEMARINE) | 1-877-AUDIOPIPE